

# Diamond Light Source Proceedings

<http://journals.cambridge.org/DLS>

Additional services for *Diamond Light Source Proceedings*:

Email alerts: [Click here](#)

Subscriptions: [Click here](#)

Commercial reprints: [Click here](#)

Terms of use : [Click here](#)

---

## Development of an eccentric cam-based active pre-alignment system for the compact linear collider main beam quadrupole magnet

F. Lackner, K. Artoos, C. Collette, H. M. Durand, C. Hauviller, J. Kemppinen and R. Leuxe

Diamond Light Source Proceedings / Volume 1 / Issue MEDSI-6 / October 2011 / e32

DOI: 10.1017/S204482011000033X, Published online: 16 November 2010

**Link to this article:** [http://journals.cambridge.org/abstract\\_S204482011000033X](http://journals.cambridge.org/abstract_S204482011000033X)

### How to cite this article:

F. Lackner, K. Artoos, C. Collette, H. M. Durand, C. Hauviller, J. Kemppinen and R. Leuxe (2011). Development of an eccentric cam-based active pre-alignment system for the compact linear collider main beam quadrupole magnet. *Diamond Light Source Proceedings*, 1, e32 doi:10.1017/S204482011000033X

**Request Permissions :** [Click here](#)

Contributed paper

# Development of an eccentric cam-based active pre-alignment system for the compact linear collider main beam quadrupole magnet

F. LACKNER†, K. ARTOOS, C. COLLETTE,  
H. M. DURAND, C. HAUVILLER, J. KEMPPINEN AND  
R. LEUXE

European Organisation for Nuclear Research (CERN), CERN, CH-1211 Genève 23, Switzerland

(Received 14 June 2010; revised 2 September 2010; accepted 22 September 2010)

Compact linear collider (CLIC) is a study for a future electron–positron collider that would allow physicists to explore a new energy region beyond the capabilities of today’s particle accelerators. The demanding transverse and vertical beam sizes and emittance specifications are resulting in stringent alignment and a nanometre stability requirement. In the current feasibility study, the main beam quadrupole magnets have to be actively pre-aligned with a precision of 1  $\mu\text{m}$  in five degrees of freedom before being mechanically stabilized to the nanometre scale above 1 Hz. This contribution describes the approach of performing this active pre-alignment based on an eccentric cam system. In order to limit the amplification of the vibration sources at resonant frequencies, a sufficiently high eigenfrequency is required. Therefore, the contact region between cam and support was optimized for adequate stiffness based on the Hertzian theory. Furthermore, practical tests performed on a single-degree-of-freedom mockup will show the limitation factors and further improvements required for successful integration in a full-scale quadrupole mockup presently under design.

---

## 1. Introduction

Eccentric cams are commonly used in a wide field of accelerator alignment systems. CERN is currently studying the further development of existing eccentric cam systems which were developed for the Stanford linear collider in 1986. The principle has been adopted in several light sources. A main requirement for compact linear collider (CLIC) is to reach a luminosity of  $2.3\text{--}5.9 \times 10^{34} \text{ cm}^{-2} \text{ s}^{-1}$  at the beam interaction point (Schulte *et al.* 2009). The beam size of 40 nm in the horizontal and 1 nm in the vertical dimension demands four different types of stabilized and actively aligned quadrupole magnets applied on about 4000 modules. The length of the magnets varies between 420 mm and 1915 mm. The theoretic approach of developing adequate hardware for stabilization and alignment is currently based on studying a single degree of freedom (d.o.f) oscillator described

† Email address for correspondence: Friedrich.Lackner@cern.ch

in (Artoos *et al.* 2009). The overall approach requires a rigid alignment stage with an accuracy specified to 1  $\mu\text{m}$  (Riddone *et al.* 2008).

## 2. Single d.o.f. mockup

A cam mockup was developed in order to test and optimize all relevant design parameters towards minimum clearance. The platform is based on rigid walls providing a low-friction linear motion roller guide (figure 1). In a first iteration, a single cam similar to the design approach adopted by Schlott *et al.* is applied underneath the platform. For monitoring the displacement accuracy and repeatability, three distance offset measurement systems (DOMS) (Herty 2009) are applied on the horizontal plate, currently displaced in an open-loop circuit. Improvements on mechanical parts are currently in progress. The mockup concept was theoretically based on a form closed case approach, the system equation (1) is based on the vibration theory whereas  $\vartheta_{1,2}$  defines the damping ratio,  $\omega$  the angular velocity, and  $s$  and  $x$  the follower displacement (Norton 2009).

$$\ddot{x} + 2\vartheta\omega_n\dot{x} + \omega_n^2x = \omega_n^2s + 2\vartheta\omega_n\dot{s} \quad (1)$$

In order to optimize the cam rigidity and therefore the Hertz contact stress in the contact plane, the prediction of damping ratio is crucial. To accurately predict the value at any design stage by calculation method is difficult. A first approach to measure the damping ratio based on accelerometers and excitation (Koster) did not provide sufficient information due to the rigid guiding. Measurements will be replicated on the future five d.o.f. mockup with interchangeable design approach. The setup is currently optimized and improved by using harmonic drive and cam follower as well as a rotary encoder for closed-loop operation.

## 3. Series of measurements

The eccentric cam mover has a vertical movement range of 10 mm. Its trajectory is sinusoidal (Norton 2009) which means that a 180° rotation corresponds to the full movement range. In the current setup, this translates to 9 million motor steps through transmission in the one d.o.f. test setup. The measured cam was supported with a spherical bearing in the first iteration. Due to the sinusoidal trajectory, motor steps transform to vertical movement according to the orientation of the CAM mover. First, repeatability tests are showing random uncertainty due to misalignment of

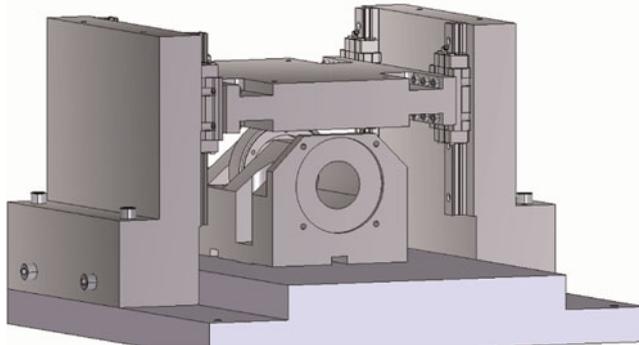


FIGURE 1. One d.o.f mockup with roller guiding.

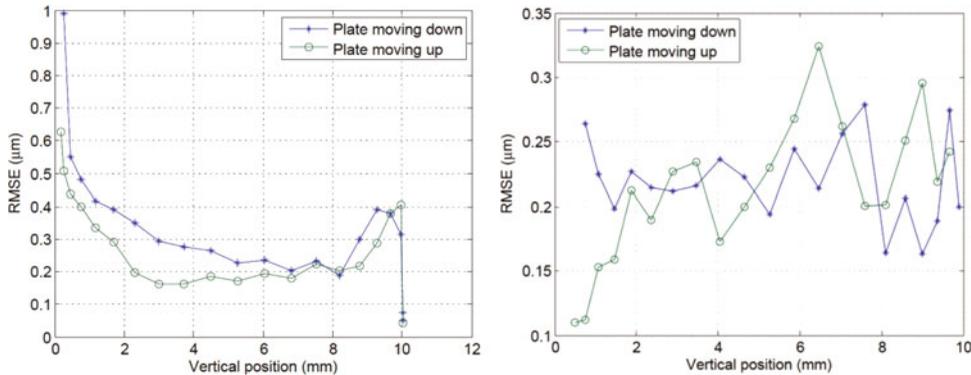


FIGURE 2. RMSE of one d.o.f. CAM mover test setup vertical positioning as functions of mean values. (Left) Test series within the whole stroke and (right) test series within a reduced stroke.

the contact axis with respect to the cam axis. The repeatability test was performed on the entire range of vertical plate displacement. This was investigated by cycling the plate 10 times between upper and lower dead centre. Within each cycle the plate was stopped 20 times to measure the vertical plate position. Figure 2 (left) shows the results of the repeatability test. Near the lowest position, DOMS in maximum separation, the figure does not provide RMS error (RMSE) values due to the limitation by the acquisition rack's voltage range. Near the opposite end of the movement range, the results are reliable. It can be seen that, as expected, the RMSE values are increasing significantly near the upper and lower limits of stroke. A second set of measurements was performed using a reduced stroke between 1 million and 8 million motor steps. The results are presented in figure 2 (right); the result clearly shows the increasing precision due to reduced stroke operation. The repeatability for the second series of measurement was found to be better than  $0.3 \mu\text{m}$ .

#### 4. Conclusion

A test setup for a single d.o.f. eccentric cam was developed to optimize mechanical properties of mechanical components. The setup is further optimized using state-of-the-art technology for micrometric positioning. First, tests based on a spherical bearing show promising results when operating in repeatability mode. The repeatability was found to be better than  $0.3 \mu\text{m}$  when operated with partial stroke. Implementation of harmonic drive, cylindrical roller cam follower and rotary encoder will further minimize the system uncertainties. This will provide important information for future integration of a 5 d.o.f. system in the CLIC test module currently under development. The setup will then allow investigating critical information like eigenfrequency and damping ratio for the integration of the nanometre stabilization system.

#### Acknowledgement

The research leading to these results has received funding from the European Commission under the FP7 Research Infrastructures project EuCARD, grant agreement no. 227579.

## REFERENCES

- ARTOOS, K., CAPATINA, O., COLLETTE, C., GUINCHARD, M., HAUVILLER, C., LACKNER, F., PFINGSTNER, J., SCHMICKLER, H., SYLTE, M. 2009 Study of the stabilization to the nanometer level of mechanical vibrations of the CLIC main beam quadrupoles. In *Proceedings of PAC 09*, Vancouver, BC, Canada. TH5RFP080
- HERTY, A. 2009 Micron precision calibration methods for alignment sensors in particle accelerators. 1th Master thesis, Nottingham Trent University.
- KOSTER, M. P. *Vibrations of Cam Mechanisms*. Phillips Technical Library Series, Macmillan Press Ltd.
- NORTON, R. L. 2009 *Cam Design and Manufacturing Handbook*, 2nd edn. Industrial Press, Inc. ISBN 978-0-8311-3367-2.
- RIDDONE, G. et al. 2008 *Technical specification for the CLIC two-beam module.*, EPAC 08, Genoa, Italy.
- SCHLOTT, V. et al. Dynamic alignment at SLS. In *Proceedings EPAC 00*, European Organization for Nuclear Research (CERN), Geneva, Switzerland.
- SCHULTE, D. et al. 2009 Beam based alignment in the new CLIC main linac. In *PAC 09 Proceedings*, Vancouver, Canada.